


PolyTrac Gold Barcode Labels

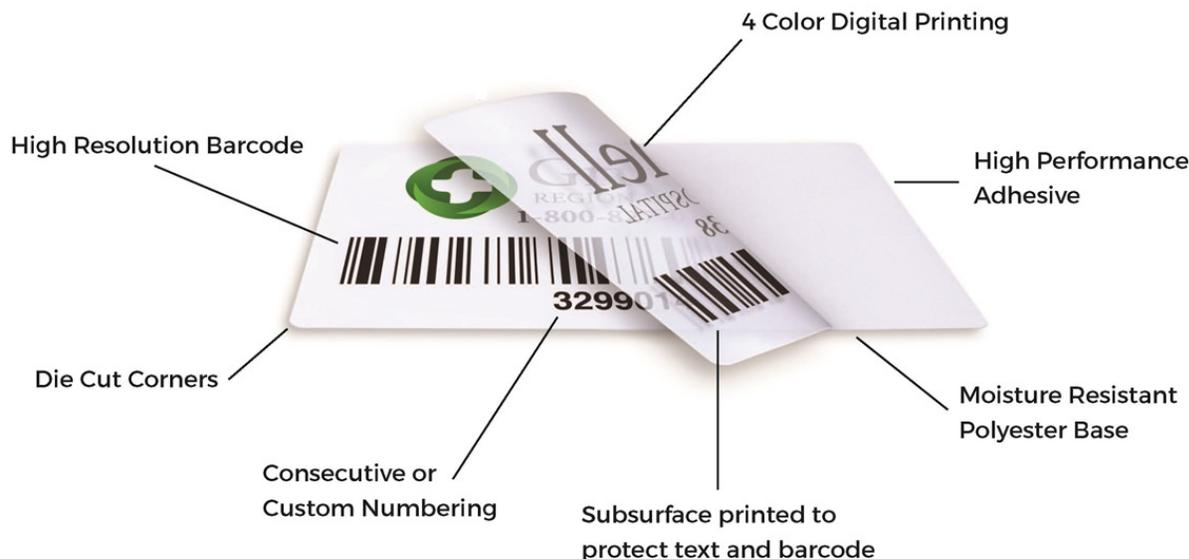

PolyTrac Gold Barcode Labels provide the flexibility and functionality you need in a basic polyester barcode label.

Designed for a variety of applications, the versatile polyester is pliable enough to conform to curved surfaces and durable enough to resist caustics, solvents and mild abrasion.

These labels are subsurface printed which provides an extra layer of protection for the logos, copy and bar code against solvents, caustics, acids and mild abrasion. This unique process eliminates the need for an extra laminate to protect the print; thereby eliminating the additional cost as well as the potential of delamination.

.002" thick, pressure-sensitive adhesive provides permanent adhesion that sticks well to a variety of surfaces

The digital printing process used to produce these labels ensures even the most detailed logo or text will look crisp and clean.

Key Product Features

- Subsurface printing protects against extreme solvents, caustics, acids and mild abrasion while eliminating need for a laminate
- Digital printing process ensures barcode readability as well as crisp, clean company logos
- Durable .002" polyester material easily conforms to uneven or radius surfaces
- Polyester base material helps is more resistant to water and damp environments
- .002" thick adhesive provides excellent adhesion to low-surface energy materials

Not sure what product you need?

Call Our Trained Experts!

Toll Free: 1-866-916-5600



Website: www.labeloutlet.com

E-mail: customerservice@labeloutlet.com



PolyTrac Gold Barcode Label Specifications

Material: .002" thick white polyester which can withstand moderate to harsh exposure, mild to moderate abrasion and temperatures up to 250°F for short durations.

Serialization: Barcode and human-readable equivalent is produced using the latest high-resolution digital technology available, which provides excellent clarity and easy scanning.

Code 39 is the standard symbology with a range of 2.7 to 9.4 CPI (characters per inch). Optional symbologies include Code 128, I 2 of 5, 2D DataMatrix and QR Code.

Label Copy: The label copy may include block type, stylized type, logos or other designs. All copy, block type, stylized type, logos, designs, and bar code are subsurface printed. This unique process provides excellent resistance to solvents, caustics, acids, and moderate abrasion.

Standard Sizes:

2" x 1"	1 1/2" x 3/4"
2" x 5/8"	2" x 3/4"
1 3/4" x 5/8"	1 3/4" x 1/2"
1 1/4" x 1/2"	2 3/4" x 1 1/4"

Standard Adhesive: .002" MC06 adhesive. This adhesive has excellent durability, particularly suited for a wide range of polyolefin and other low-surface energy materials (powderpaints, etc.).

Packaging: Shipped on convenient rolls with scrap matrix removed for ease of removal. Cleaning solution is provided to assist in applying to a clean surface. Cartons are clearly marked to indicate serial numbers of labels.

Shipment: 6 work days upon receipt of order and proof approval.

To Order: Order online or Call [1-866-916-5600](tel:1-866-916-5600) and ask for customer service.